






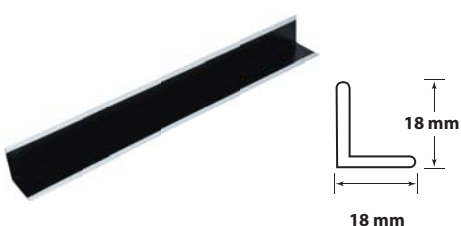
EXPOSED TEE GRID CEILING SYSTEM : T15.3838

Features:

- Hot dipped galvanized coating a superior rusting protection better than electro galvanized, painted or tin plated systems.
- Proprietary design for a strong resistance to torque distortion and better rigidity during installation.
- Strong and secure connection system for main and cross tees to prevent accidental dislocation.
- Fast and easy installation and alignment with precision.
- Design for easy cutting.
- Superior strength and rigidity for high performance with a better loading capacity.
- Slots at 150mm centers suited for most configurations.
- System is engineered and designed to fit most Ceiling tiles.

*Acoustic *Aesthetic *Durable

EXPOSED TEE GRID CEILING SYSTEM :

T15.3838	Item number	Description	Dimensions	
			Slot Spacing	Length
	TBL MT1538 0116M	Main Tee: T15.38 M	150 mm	3600 mm
	TBL MT1538 0216I	Main Tee: T15.38 I	6"	12'
	TBL XT1538 0116M	Cross Tee: T15.38 M (1200 mm)	600 mm	1200 mm
	TBL XT1538 0216I	Cross Tee: T15.38 I (4')	24"	4'
	TBL XT1538 0316M	Cross Tee: T15.38 M (600 mm)	-	600 mm
	TBL XT1538 0416I	Cross Tee: T15.38 I (2')	-	2'
	TBL W1818 0116M	Wall Angle: 18.18 (3000 mm)	-	3000 mm
	TBL W1818 0216I	Wall Angle: 18.18 (10')	-	10'

Material

Double-web hot dipped galvanized steel

Color

White (WH)

Finish

Cap exposed surface with baked polyester coating

Standard

ASTM C635

Cross Tee/Main Tee Exposed Joints

Overlap

Distributed by:



SCL Solution Co., Ltd.

19/107 Chuanchuen Modus Centro Moo 2 Chaengwattana 41,
Changwattana, Klongkuer, Pak Kret, Nonthaburi THAILAND 11120
Office 02-5753453, 098-2720079 / Fax 02-5753454
e-mail: customercarescls@gmail.com www.scls.co.th

*Acoustic *Aesthetic *Durable

ROCK **SG**
Ceilings for Professionals